

ROCK
GRANITO

The feel of
REAL
marble

1200X1800MM
Silk Surface

www.rockgranito.com



A large, stylized, light gray opening quotation mark on the left side of the text block.

With more than 10+ years of experience in the industry, we are a leading-edge ceramic products manufacturing company with a vision to develop and deliver outstanding surface solutions for our clients. The upward graph of the Rock-Granito is the outcome of its efforts to stay ahead of time.

Our manufacturing and processing units are equipped with state-of-the-art technology, efficient processes, expert workforces, and high-tech machinery, all synergizing towards our mission to produce quality products at a competitive price while fostering a climate where environmental technologies can thrive.

At Rock Granito, we recognize that when we listen to others, we cultivate the curiosity and empathy to unlock innovation. Our people are the driving force of the business. We endeavor to leverage talent and innovation to realize our global aspirations and harness the opportunity for the young and growing India.

A large, stylized, light gray closing quotation mark on the right side of the text block.

ARTISTIC & TECHNICAL PERFECTION WITH ELEGANCE DESIGNS

AESTHETIC SIZE

A complete and versatile project : from the largest size available in the ceramics market, 1200x1800cm and 9mm thick to the most common size passing through a full range of intermediate sizes.

AWSOME STYLE

The ceramic design interprets different inspirations, ensuring maximum aesthetic appeal in any type of environment and giving each its own style.



MAKE LIFE WORK OF ART

Hidden away in the varied, multi-faceted appeal of granite are stories from the past and present, pulsating with life. A fine line separates the artificial from the natural, when light spreads through and leaves its mark on surfaces strongly bonded with the living styles of the future.

The inspiration comes from two granites of Brazilian origin: the distinctive blue of Azul Bahia and the deep black of Via Lattea, both crossed through by white-veins and with a small-medium grain. The other colours start out from the black, gradually shifting through dark and light grey to white.

TECHNICAL FETURES



LIQUID
REPELLENT



STAIN
RESISTANT



SCRATCH
RESISTANT



FIRE
RESISTANT



RESISTANT TO
UV RAYS



IMPACT
RESISTANT



FROST
RESISTANT

BEDROOM



HOSPITAL



SCHOOL



KITCHEN



AIRPORT



LIBRARY



The feel of REAL marble

ARMANI BIANCO

1200X1800MM | SILK SURFACE

www.rockgranito.com



LIQUID
REPELLENT



STAIN
RESISTANT



SCRATCH
RESISTANT



FIRE
RESISTANT



RESISTANT TO
UV RAYS



IMPACT
RESISTANT





FROST
RESISTANT



ARMANI BIANCO

1200X1800MM | SILK SURFACE

03 Random

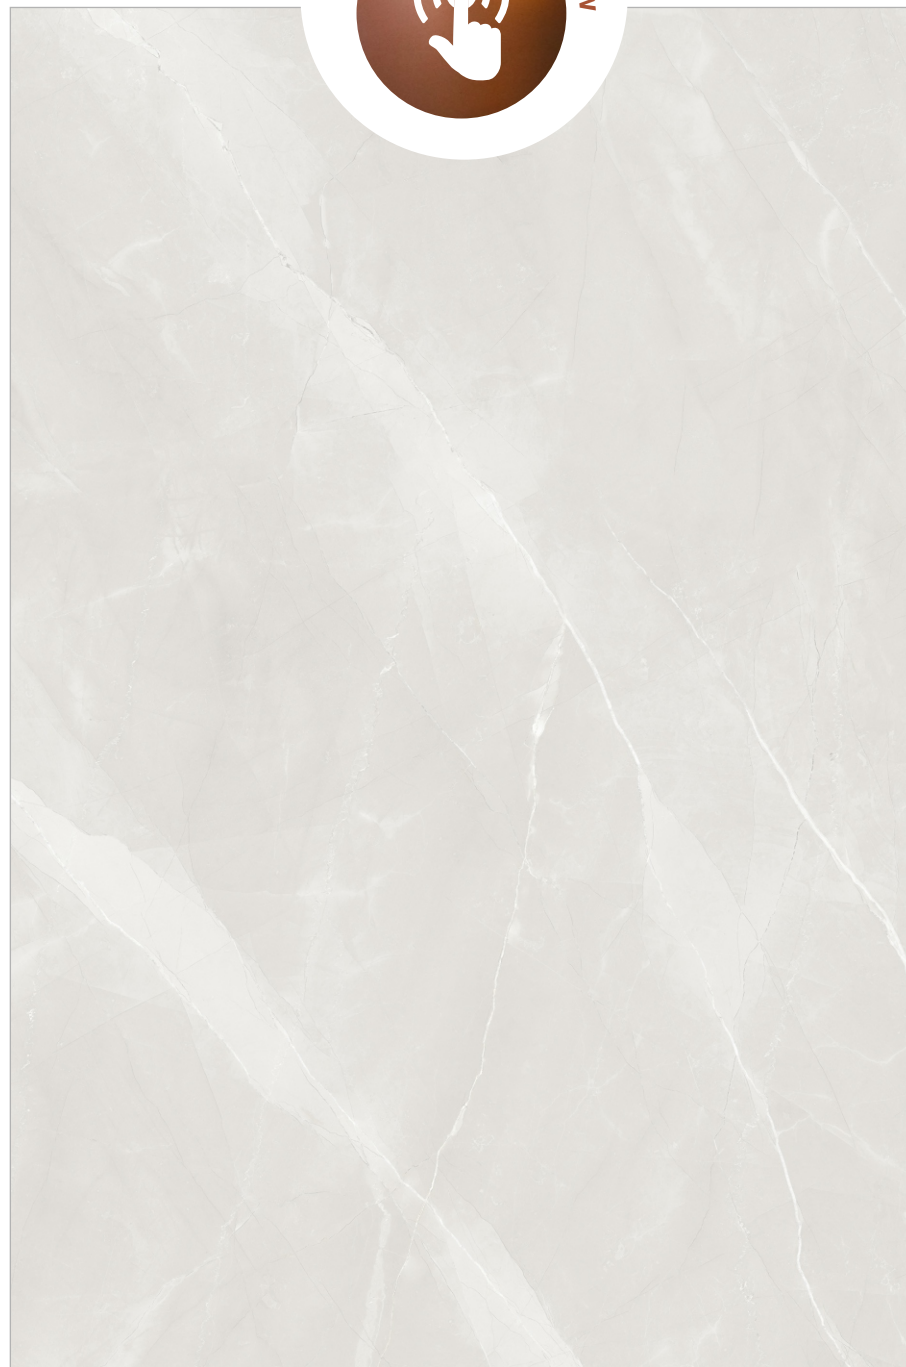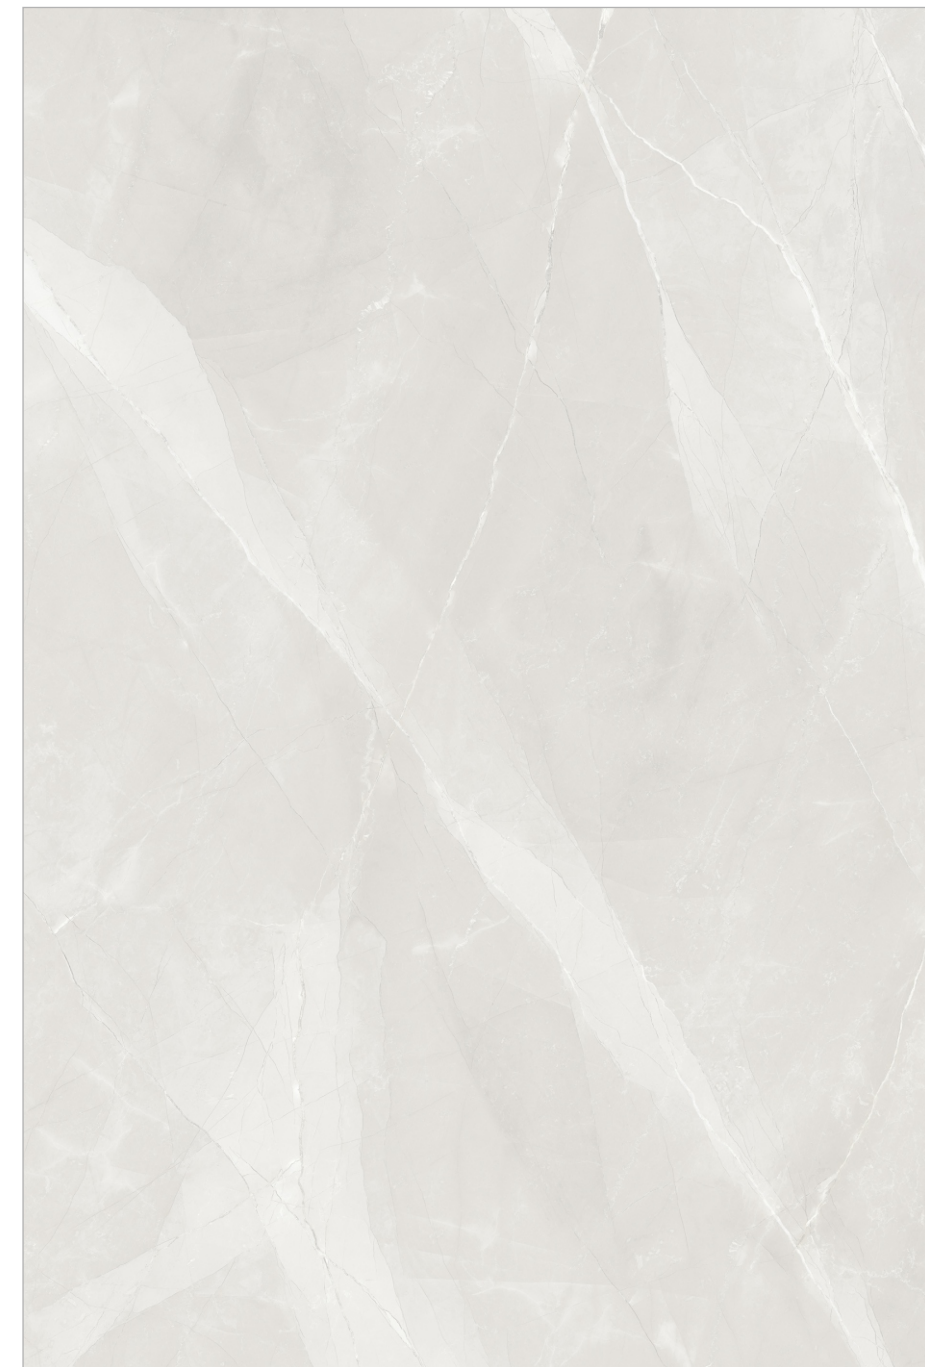



The feel of REAL marble

CALCATA BROWN

1200X1800MM | SILK SURFACE

www.rockgranito.com

-  LIQUID REPELLENT
-  STAIN RESISTANT
-  SCRATCH RESISTANT
-  FIRE RESISTANT
-  RESISTANT TO UV RAYS
-  IMPACT RESISTANT
-  FROST RESISTANT



CALCATA BROWN

1200X1800MM | SILK SURFACE



03 Random



PREVIEW OF CALCATTA BROWN

1200X1800MM | SILK SURFACE

The feel of REAL marble

COCADA DREAM LIGHT

1200X1800MM | SILK SURFACE

www.rockgranito.com



COCADA DREAM LIGHT

1200X1800MM | SILK SURFACE



03 Random



PREVIEW OF COCADA DREAM LIGHT

1200X1800MM | SILK SURFACE

The feel of REAL marble

GEM GREY

1200X1800MM | SILK SURFACE

www.rockgranito.com



GEM GREY

1200X1800MM | SILK SURFACE



03 Random





The feel of REAL marble

LISA GREY

1200X1800MM | SILK SURFACE

www.rockgranito.com



LISA GREY

1200X1800MM | SILK SURFACE



03 Random





PREVIEW OF LISA GREY

1200X1800MM | SILK SURFACE

The feel of REAL marble

MICHEL ANGELO

1200X1800MM | SILK SURFACE

www.rockgranito.com



-  LIQUID REPELLENT
-  STAIN RESISTANT
-  SCRATCH RESISTANT
-  FIRE RESISTANT
-  RESISTANT TO UV RAYS
-  IMPACT RESISTANT
-  FROST RESISTANT



MICHEL ANGELO

1200X1800MM | SILK SURFACE

04 Random

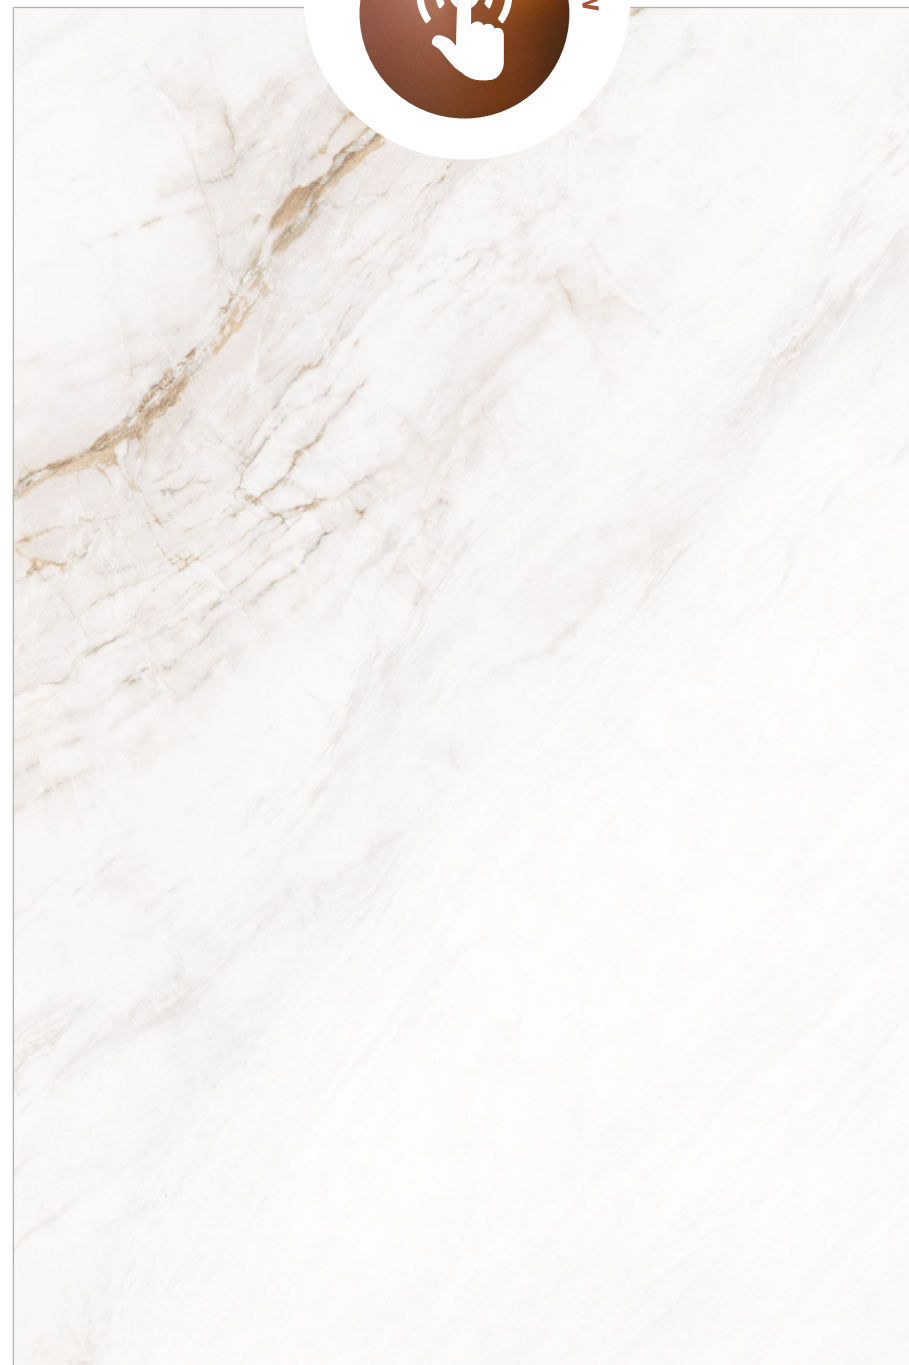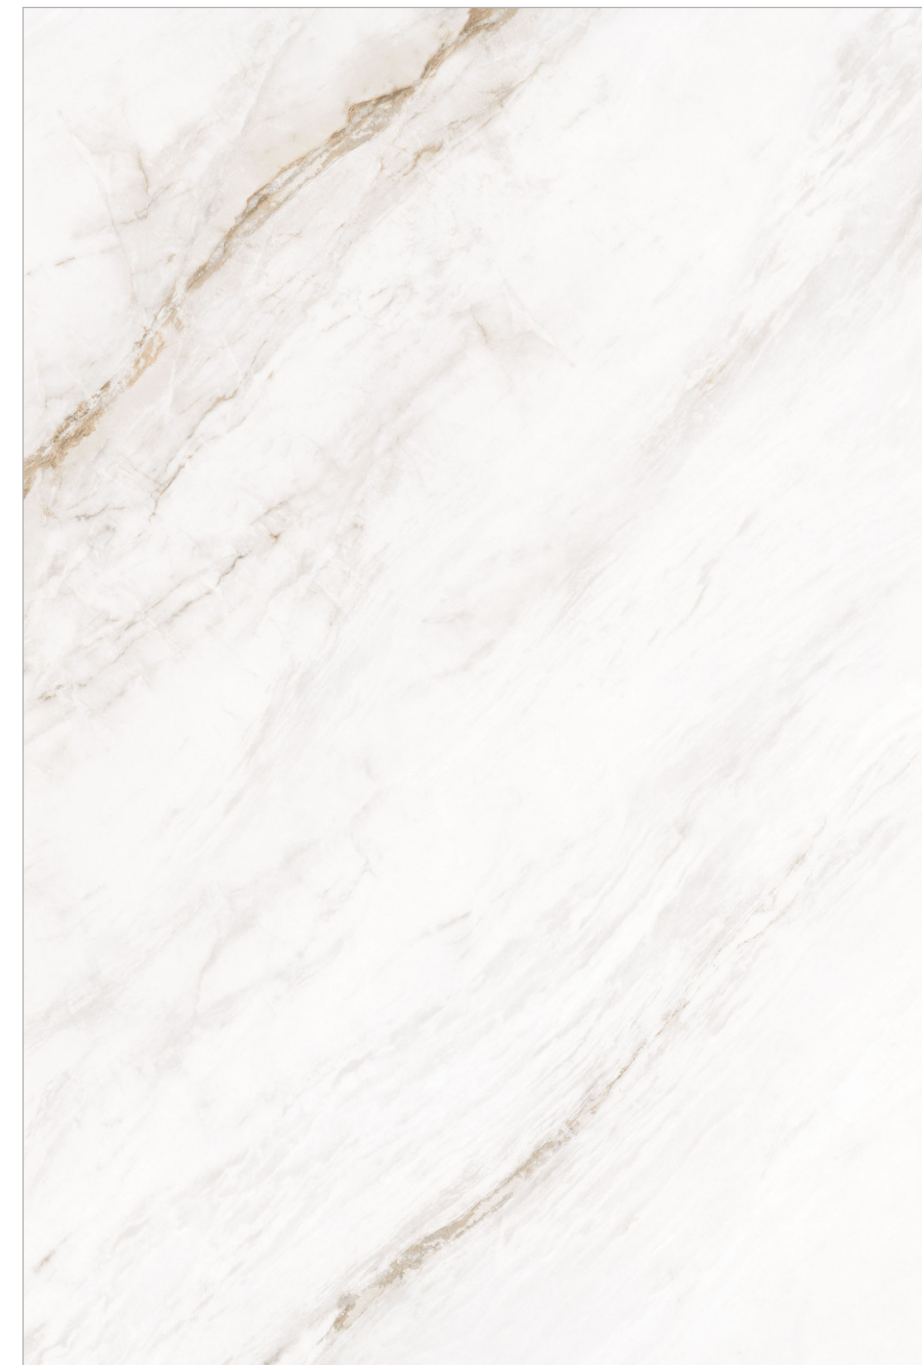



The feel of REAL marble

NOVA

1200X1800MM | SILK SURFACE

www.rockgranito.com



LIQUID
REPELLENT



STAIN
RESISTANT



SCRATCH
RESISTANT



FIRE
RESISTANT



RESISTANT TO
UV RAYS



IMPACT
RESISTANT



FROST
RESISTANT



NOVA

1200X1800MM | SILK SURFACE



03 Random





The feel of REAL marble

ONYX WHITE

1200X1800MM | SILK SURFACE

www.rockgranito.com



LIQUID
REPELLENT



STAIN
RESISTANT



SCRATCH
RESISTANT



FIRE
RESISTANT



RESISTANT TO
UV RAYS



IMPACT
RESISTANT




FROST
RESISTANT



ONYX WHITE

1200X1800MM | SILK SURFACE

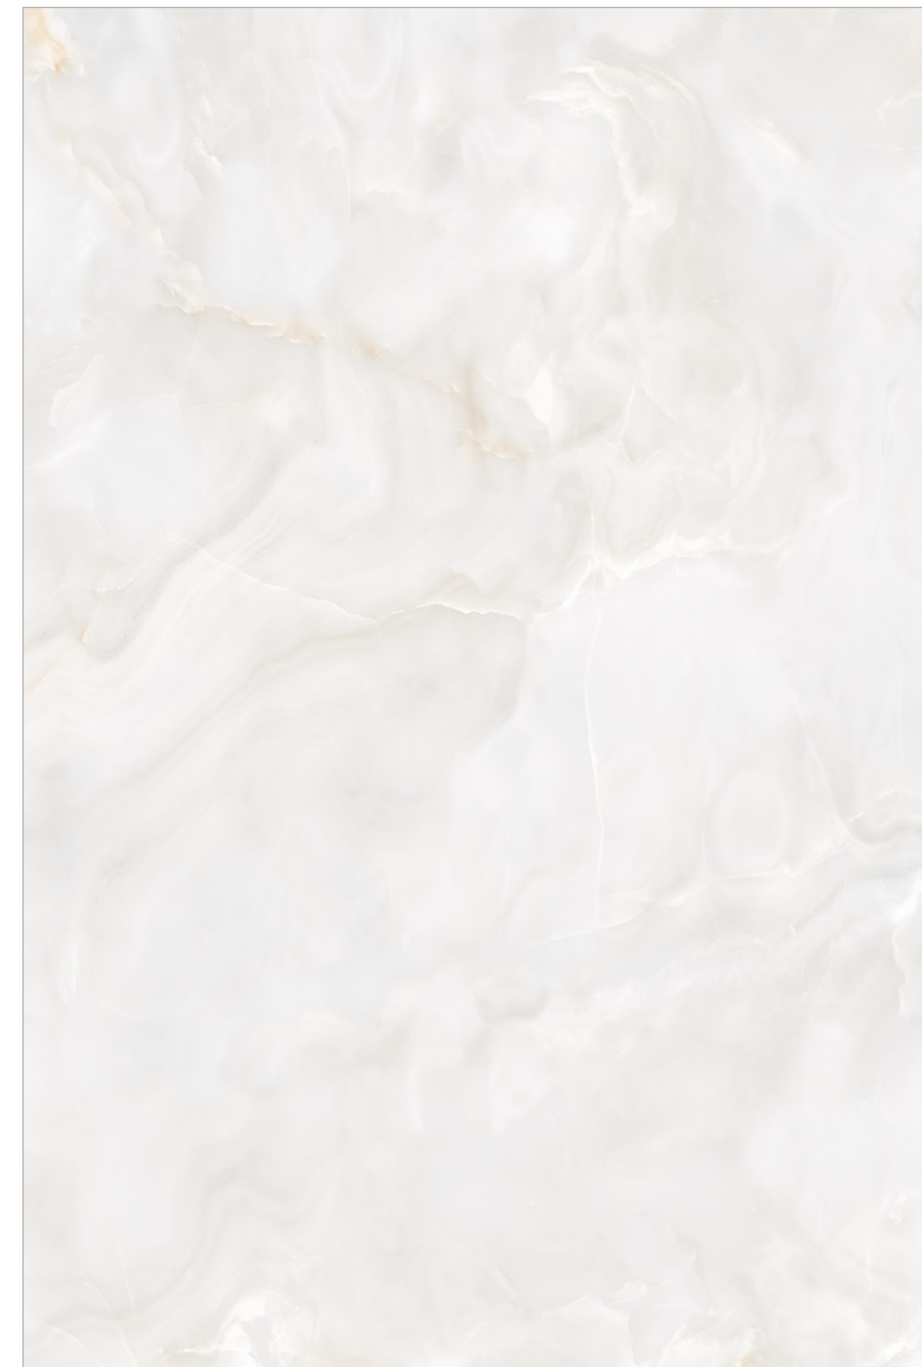

04 Random





PREVIEW OF ONYX WHITE

1200X1800MM | SILK SURFACE

The feel of REAL marble

RIZZONI

Endless

1200X1800MM | SILK SURFACE

www.rockgranito.com



RIZZONI

1200X1800MM | SILK SURFACE



Endless
03 Random



The feel of REAL marble

VENUS WHITE

1200X1800MM | SILK SURFACE

www.rockgranito.com



LIQUID
REPELLENT



STAIN
RESISTANT



SCRATCH
RESISTANT



FIRE
RESISTANT



RESISTANT TO
UV RAYS



IMPACT
RESISTANT



FROST
RESISTANT



VENUS WHITE

1200X1800MM | SILK SURFACE



03 Random





PREVIEW OF VENUS WHITE

1200X1800MM | SILK SURFACE

The feel of REAL marble

VICTORIAN LIGHT

1200X1800MM | SILK SURFACE

www.rockgranito.com



VICTORIAN LIGHT

1200X1800MM | SILK SURFACE

03 Random






PREVIEW OF VICTORIAN LIGHT


1200X1800MM | SILK SURFACE

General Indication For Handling, Cutting And Laying


Handling

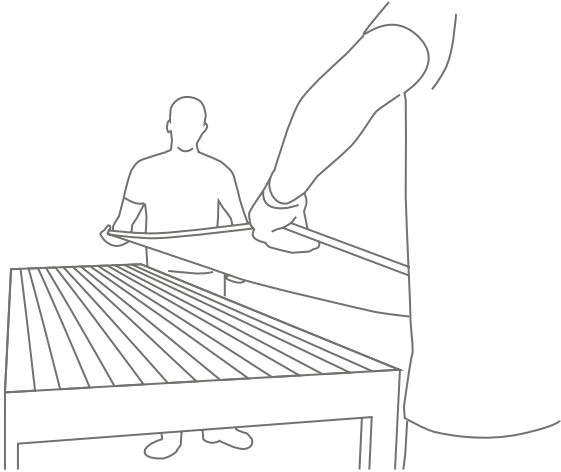


Where possible, mechanical lifting systems should be used for delivering slabs above the ground floor.

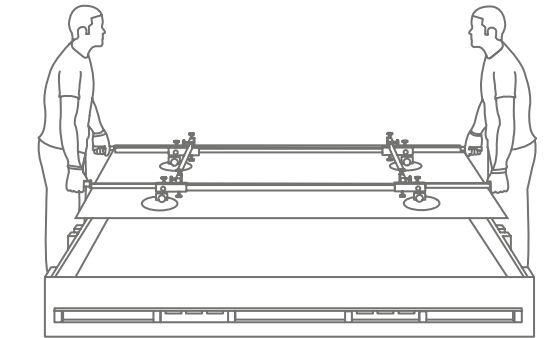


Handling the slabs on the floor can be managed with the aid of a frame fitted with suction cups to make the slabs more stable.

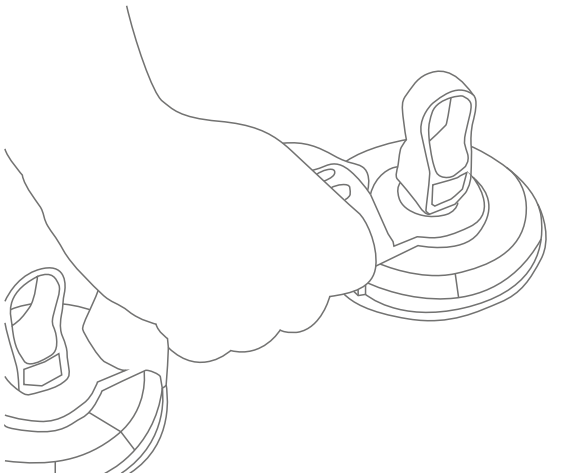


The appropriate suction cups may be used for manual handling.

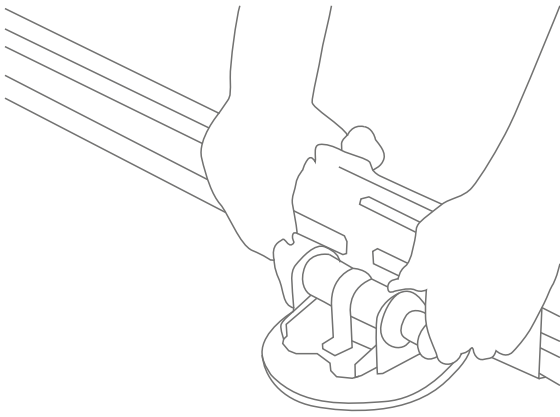

To facilitate handling of slabs with textured surfaces, the appropriate suction cups should be used.

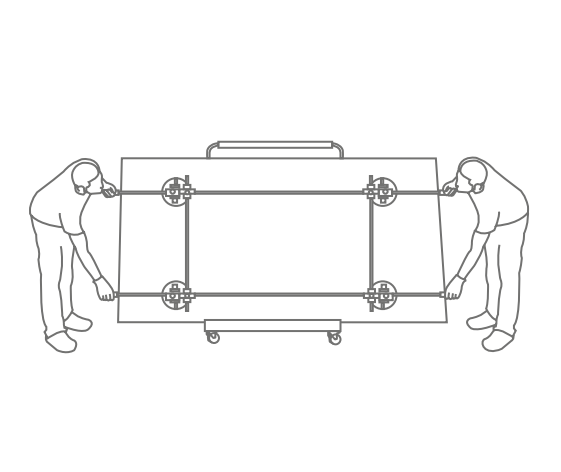


For moving the slabs over large surfaces, a forklift can be used.

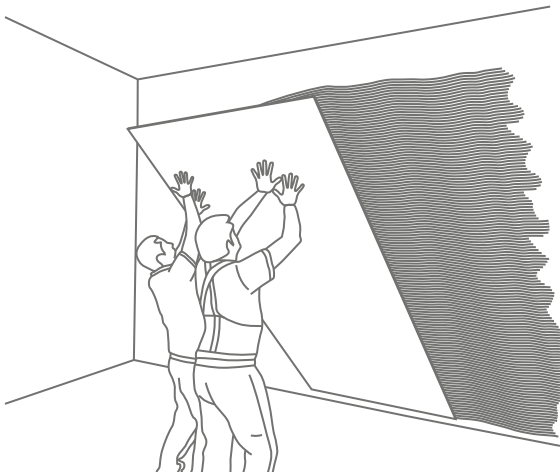


Once the slab is in position, excess air should be removed completely by tapping it either manually or mechanically using the appropriate trowel, starting from the centre and moving out towards the sides.


Cutting

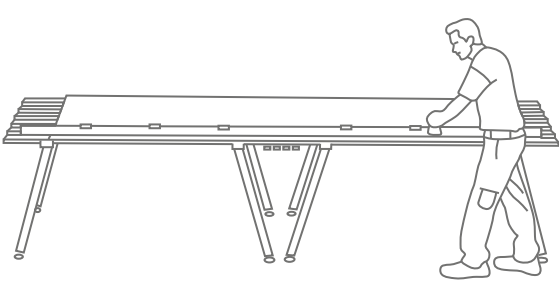

Cutting operations should be carried out on a perfectly stable, flat surface.

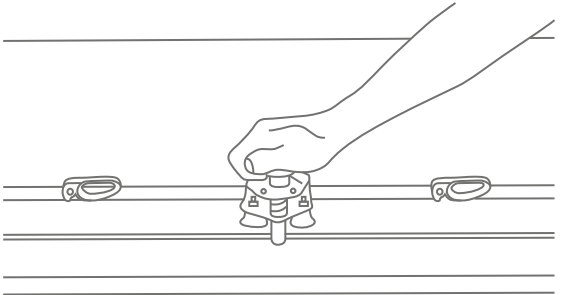


A cutting guide fitted with a diamond tip tool is recommended.

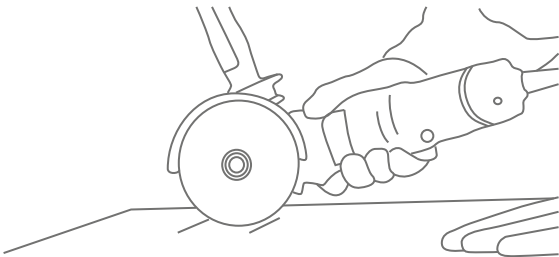


To cut the slab without breaking the material, the appropriate shears should be used.



The slabs can also be cut with a dry saw or wet saw with a diamond wheel cutter.

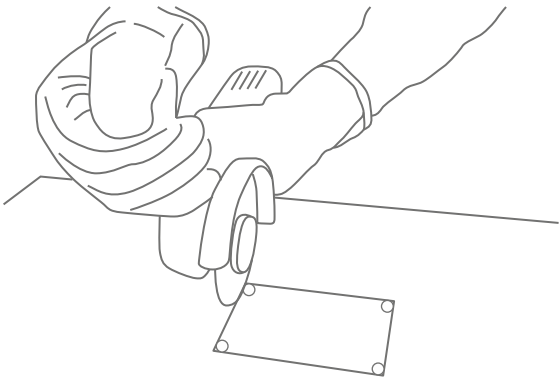

For L-shaped cuts or cuts inside the slab, holes should be bored at the vertices to prevent the blade of the cutting disk damaging the surface.

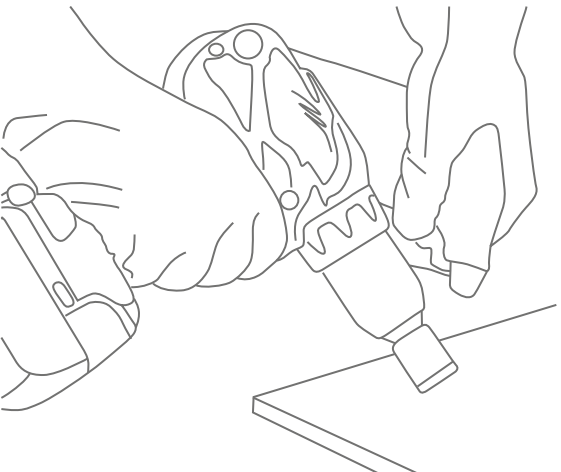

To bore cylindrical holes on the slabs, a diamond cutting tool of the desired diameter should be used, and the surface should be kept wet constantly.

TECHNICAL SPECIFICATION



TEST DESCRIPTION	TEST METHOD	ISO STANDARD 13006 B1a TILES	VALUE
Length and width	BS EN ISO 10545-2	± 0.6%	± 0.3%
Thickness	BS EN ISO 10545-2	± 5.0%	± 3.0%
Straightness of sides	BS EN ISO 10545-2	± 0.5%	± 0.3%
Rectangularity	BS EN ISO 10545-2	± 0.6%	± 0.3%
Surface flatness	BS EN ISO 10545-2	± 0.5%	± 0.3%
Water absorption	BS EN ISO 10545-3	≤ 0.5%	≤ 0.05%
Breaking strength	BS EN ISO 10545-4	≥ 1300N	≥ 1500N
Modulus of rupture	BS EN ISO 10545-4	≥ 35 N/mm ²	≥ 45N/mm ²
Resistance to deep abrasion	BS EN ISO 10545-6	≤ 175mm ³	≤ 150mm ³
Linear thermal expansion	BS EN ISO 10545-8	≤ 9 x 10 ⁻⁸ °C ⁻¹	≤ 7 x 10 ⁻⁶ °C ⁻¹
Thermal shock resistance	BS EN ISO 10545-9	No visible defect	No visible defect
Frost resistance	BS EN ISO 10545-12	Frost proof	Frost proof
Resistance to chemicals	BS EN ISO 10545-13	No visible effect	No visible effect
Resistance to stain	BS EN ISO 10545-14	Manufacturer to state class	Stains removed Min. Class 2
Colour resistance	BS EN ISO 10545-16	No damage	No damage
Colour resistance to UV Light	DIN 51094	No change in color	No change in color
Scratch hardness(MOH's Scale)	EN 101	≥ 6 MOHS	≥ 7 MOHS
Surface quality	BS EN ISO 10545-2	Min. 95%	No visible defect
Skid resistance (friction co-efficient)	BS EN ISO 10545-17	> 0.4	>0.4
Moisture Expansion	-	Nil	Nil



10⁺

Year Of Experience

200⁺

Unique Designs

40⁺

Export Countries

PACKING DEATILS

Size	Pcs / Box	Weight (Approx)	Thickness (Approx)	SQ. / Box
1200x1800	2	90 kg	9mm	46.50



Survey No.13 P1, 13p2, And 14p1,
Morbi-halvad Road, Village Unchi Mandal,
Morbi. 363642(Gujarat)

+91 97124 55551

www.rockgranito.com